


PCT/PTO 06 OCT 2004

PCT/IB 03/0118

21 03 03



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Evans

Dated 12 December 2002

BEST AVAILABLE COPY

The
Patent
Office



1/77

The Patent Office
Cardiff Road
Newport
Gwent NP10 8QQ

request for grant of a patent
notes on the back of this form. You can
get an explanatory leaflet from the Patent
Office to help you fill in this form)

Your reference

PHGB020039

Patent application
(The Patent)

0208317.8

11 APR 2002

Full name, address and postcode of the or of
each applicant (underline all surnames)

11APR02 E710141-1 D02879
KONINKLIJKE PHILIPS ELECTRONICS NV
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (if you know it)

7419294001

If the applicant is a corporate body, give the
country/state of its incorporation

THE NETHERLANDS

Title of the invention

CONTROLLING A HOME ELECTRONICS SYSTEM

Name of your agent (if you have one)
"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Andrew G. White
Philips Intellectual Property and Standards
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (if you know it)

7133473003

If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority Application number
(if you know it)

Date of filing
(day/month/year)

If this application is divided or otherwise
derived from an earlier UK application, give
the number and the filing date of the earlier
application

Number of earlier application

Date of filing
(day/month/year)

Is a statement of inventorship and of right to
grant of a patent required in support of this
request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an
applicant, or
- c) any named applicant is a corporate body.
See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	13
Claims(s)	4 <i>DM1</i>
Abstract	1
Drawings	5 <i>only</i>

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents
Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and
search (*Patents Form 9/77*)
Request for substantive examination
(*Patents Form 10/77*)
Any other documents
(*Please specify*)

1.

I/We request the grant of a patent on the basis of this application.

Signature

Date 10 - 4 - 2002

2. Name and daytime telephone number of person to contact in the United Kingdom

01293 815137

(P. V. HILLIER)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

CONTROLLING A HOME ELECTRONICS SYSTEM

5 The present invention relates to a method and apparatus for the control of a home electronics system comprising a plurality of components.

Home entertainment components such as TV, VCR, DVD and audio receiver are sold as individual products. Brands compete on the basis of features and other factors. Products incorporate standardised signal interfaces (RCA, Scart, etc.) to facilitate interconnection between brands. However, each product is essentially controlled as a standalone equipment with its own user interface and, usually, dedicated remote controller. The user of a home electronics system ends up with a host of remote controllers. To control a particular product, the user must locate the correct remote controller and remember which keys to press to invoke the desired function; indeed some functions require more than one product to be set-up, in turn requiring the use of more than one remote controller. Another issue is that, as the number of product features increases, the tendency is for manufacturers to use display-based user interfaces so as to limit the number of keys on remote controllers; the result is that individual products (and their associated remote controllers) are increasingly operated using generic commands such as 'menu', 'cursor_up'/_down/_left/_right, 'OK', etc. Thus there may be a duplication of generic commands across the set of remote controllers the user may possess; a duplication which has not been exploited.

25 To date, the universal remote control has become a popular means to control a plurality of products; however, these have the disadvantage that the user has to remember to change (product) mode in order to change control to another product.

30 International patent application WO00/70578, assigned to the present applicant, discloses a system and method for controlling multiple home electronics devices. It describes the use of a single remote control (e.g. the TV

remote) to control a device controller which in turn controls other home devices in addition to the TV; in response to receiving commands from the remote control, the device controller generates and transmits commands suitable for controlling any of the home devices. A disadvantage of this system (and also
5 of the universal remote control, discussed earlier) is the requirement to involve the user in initialisation and (as required, for example when adding a device to the system) updating procedures to ensure that commands are correctly translated. This can be a significant burden for a user.

10 It is an object of the present invention to overcome these and other disadvantages through an improved method and apparatus for controlling a home electronics system.

In accordance with the present invention there is provided a method for
15 controlling a home electronics system comprising a plurality of components, the method being managed independently of a user and invoked on receipt of a command, the method comprising the steps of:

- sensing an operative component in the system;
- adapting the command to produce at least one substitute command in
20 dependence on the operative component; and
- for each substitute command, communicating the substitute command to a component in the system, which component being operable to respond to the substitute command.

The method of the present invention removes from the user the burden
25 of configuring the system (for example, initialisation and/or updating of the configuration as components are added to or removed from the system). The mechanism used to achieve this may include a received command recognition capability whereby commands addressed to the system can be correctly received, decoded and identified; and a system context sensing capability
30 whereby the status of the home electronics system can be monitored to identify one or more presently operative components and detect subsequent changes as and when they occur.

The system context may be changed using a variety of methods, including but not limited to manual control of a component by means of its local user interface, or remote control by means of explicit commands.

Also in accordance with the present invention there is provided an apparatus arranged to control a home electronics system, the apparatus being managed independently of a user, the apparatus comprising:

- a data processing unit, comprising a CPU, program ROM and RAM;
- a first communications port operable to receive a command;
- a second communications port operable to receive a signal indicating an operative component in the system; and
- a third communications port operable to output a substitute command,

the data processing unit being arranged to adapt the command to produce at least one substitute command in dependence on the operative component.

The apparatus of the invention may receive any type of command, for example issued by the user or on his/her behalf. One example is a keypress on a local keypad of a component in the system. For instance, when the overall system is in 'standby', the user may depress the 'ON' key on the local TV keypad; the apparatus of the invention may receive and adapt this command and in response may issue one or more 'on' commands specific to the other system components thereby bringing them out of standby mode in preparation for operation.

Another type of command that might be received by the apparatus is a remote control command. One example is an infrared remote control command associated with a component in the home electronics system. In this case, the apparatus might only perform a simple adaption whereby the command is forwarded to the component using an appropriate medium, as available to the apparatus and discussed in more detail below. A further example might be where the user is viewing a VCR playback. He/she grasps the physically nearest remote control (say, a DVD remote) and presses the 'stop' command on the remote control. The apparatus receives this command and, using a command recognition capability as discussed earlier, it may recognise and decode the low level data encoding, for example by using a

built-in decoder suitable to decode known remote control data protocols (for example, in the case of infrared including, but not limited to, pulse position and Philips RC5/6); it may then identify the command ('DVD stop' in this example), for example by reference to a built-in store containing data corresponding to command encoding formats. The apparatus may then sense the present
5 operating status of the system (i.e. VCR Play). Based on these data, the apparatus could adapt the 'DVD stop' command into a substitute command
~~suitable for interpretation by the relevant VCR as a 'stop' command.~~ In this example the received command may utilise a different data encoding method
10 relative to the substitute command. The substitute command may then be sent to a system component, in this case the relevant VCR, via any suitable means including, but not limited to, wired (for example Project50, D2B, IEEE1394/HAVi, USB, RS232, or similar), infrared (for example pulse position, RC5/6) or radio (for example Bluetooth, ZigBee, HomeRF, WiFi, IEEE802.11,
15 HiperLAN); for example, the adapted command might be sent as a suitably encoded infrared 'stop' command to the VCR, thereby emulating the infrared remote controller of the VCR.

A yet further type of command is one received from an external wired bus (including, but not limited to, USB, Scart, IEEE1394/HAVi), a wired
20 network (including, but not limited to, Ethernet, RS232, PSTN, ISDN, ADSL) or a wireless network (infrared including, but not limited to, pulse position, RC5/6 and radio including, but not limited to, Bluetooth, ZigBee, HomeRF, WiFi, IEEE802.11, HiperLAN).

Commands and other data may be exchanged with an Internet server
25 via a modem. One example is where the apparatus arranges to automatically download data from an Internet server in response to detecting a new component in the system. To ensure operation with new command codes defined in future products, the apparatus might be remotely programmed, for example via an Internet server, on detecting a new component in the system,
30 without involving the user. Such updating might be achieved by the apparatus sending to the Internet server a representation of a received command associated with the new system component, which command the apparatus

cannot decode. The Internet server could then respond with data comprising a set of commands corresponding to the component, which set could then be downloaded and stored by the apparatus for use in decoding future received commands.

5 It can readily be noted that the apparatus may adapt the received commands at a variety of levels including simple transfer (that is, without code conversion) of a command from one medium to another (for example from IR to wired); alternatively, or in addition, the command may be converted from one data protocol to another data protocol (for example from RC5 to
10 Project50). Moreover, the received commands may also be generic in that they are not able, per se, to address (command) a specific component until adapted by the apparatus, examples include 'play' 'stop', 'cursor<direction>', 'OK', etc.; such commands could, for example, emanate from a special proprietary remote control or other user device.

15 A home electronics system may comprise a plurality of components and an apparatus unit embodying the invention. An existing system might be upgraded by the addition of an apparatus unit connected to the components of the system by any suitable means, for example using a Scart interface. In general, an apparatus unit may utilise one or more interfaces to receive
20 commands, to sense an operative component in the system and to send commands. The apparatus unit might be integrated within a component of the system. Preferably, such a component would be a TV receiver.

In any of the above scenarios the apparatus unit may sense an operative component by analysing the characteristics of its A/V signal output.
25 For example, it is well known in the art that video playback from VCRs exhibits specific attributes such as the end-of-field head-switching transient and also synchronisation jitter. The apparatus unit could detect such attributes and thereby deduce that a VCR component was presently operative as a source in the system. Other sources may also exhibit particular attributes, for example
30 an analogue video source derived from a tuner as opposed to a DVD player might perhaps be distinguished by the absence of VBI teletext in the latter case. However, the above distinctions are all implicit indicators and thus can

be prone to interpretation error possibly resulting in a non-robust functioning of the system. It is of course preferred that an explicit scheme is used to indicate the operative component within the system. One technique might be to use a dedicated identification methodology comprising means to indicate to the apparatus an operative component. Such schemes however are not very attractive commercially, in that they may tie a user to purchasing components of a specific brand and/or possibly make obsolete the user's existing equipment. It is therefore preferable to utilise an existing digital data scheme identifying an operative component, the apparatus is then able to sense the operative component by decoding the digital data. Suitable examples include, but are not limited to, Project50 and IEEE1394/HAVi. In a preferred embodiment, the system components and apparatus unit are interconnected using Project50. In this case, the apparatus unit may be able to explicitly sense a component operative in the system, for example by monitoring and interpreting the Project50 message traffic between components of the system. In addition, Project50 may also be used to deliver and send commands to/from the apparatus unit, as discussed earlier.

Further features and advantages will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a flow diagram of a method according to the invention;

Figure 2 is a schematic representation of an embodiment of the apparatus unit;

Figure 3 is a schematic representation of a first embodiment of a home electronics system;

Figure 4 is a schematic representation of a second embodiment of a home electronics system; and

Figure 5 is a schematic representation of a third embodiment of a home electronics system comprising an apparatus unit integrated within a component.

Within the following description of embodiments of the present invention, the term 'home electronics system' refers to any system comprising a collection of A/V components, including, but not limited to, TV, VCR, DVD player, recordable DVD, AV receiver and other components including, but not limited to, security system components (sensors, actuators, etc.), personal computers, PC peripherals, home appliances, information appliances and the like. The term 'Project50' refers to versions, as defined from time to time, of the IEC AV-Link specification for signalling using Pin10 of a Scart connection. At the time of filing of the present application, the DMI specification is emerging; it is to be noted that all references herein to the term 'Project50' include the definition of 'Project50' as incorporated in the DMI specification or any other subsequent formats, in addition to the aforementioned AV-Link specification. The term 'operative component' means a component within the home electronics system which is, for example playing media or is the most recently controlled component.

Figure 1 shows a flow diagram of a method according to the invention. The method is generally indicated at 100. Test 102 checks for a received command; when a command is received, the method senses 104 an operative component and, in dependence of the sensed component, adapts 106 the command into a substitute command which is then communicated 108 to a component of the system. The method then loops back to test 102.

Figure 2 shows a schematic representation of an embodiment of the apparatus unit. The apparatus unit is shown generally at 200. A command signal is received at port 202. The command signal may include, but is not limited to, a data message conveyed to the apparatus unit by wired or wireless means. The invention is compatible with any command signal coding format including proprietary as well as the various industry standard formats (including, but not limited to, pulse position, ZigBee-PURL, Philips RC5/6 bi-phase coding and Project50 messages). The apparatus unit comprises a data processing unit (comprising CPU 204, optional user interface 206, program ROM 208, RAM 210 all interconnected by bus 212 in standard fashion, as is known to those skilled in the art). Preferably, the data processing unit (under

software program control) decodes the received command signal and identifies the received command message, for example by comparison with data held in store 214; the identified message may be temporarily stored in RAM 210. A system status information signal is applied at port 216. This may be an information signal which implies the identity of an operative component in the system; alternatively, the information signal may explicitly identify an operative component. Either way, the data processing unit processes the signal (under software program control) to determine the identity of an operative component; this identity may be temporarily stored in RAM 210. With knowledge of the identity of an operative component and of the received command message, the data processing unit may arrange for a substitute command to be produced and sent from the apparatus to a component in the system via send command data port 218. The data processing unit may generate further commands intended for additional components in the system. This facilitates a macro type feature whereby, a set of components might be automatically configured in response to the received command. An example is where a 'stop' command is received when a DVD player is presently 'playing'; in response the apparatus might issue two commands : one to instruct the DVD player ('DVD_stop') and a second to display a menu ('display_DVD_menu'), thereby reducing the number of operations the user has to perform. Macros may be pre-defined and built-in to the apparatus to operate various types and combinations of components in a home electronics system.

Each port of the apparatus may utilise additional circuitry in order to interface to wired and/or wireless media as discussed earlier; such circuitry is well known to the skilled person and, by way of example, an embodiment is described below with respect to Figure 5.

Concerning the system status information signal input at port 216. This signal might be an analogue video signal sourced by an operative component in the system. Characteristics of the signal might be checked by the data processing unit, individually or in combination, to deduce the identity of the operative component. For example, a VCR video output may be characterised by synchronisation jitter and/or the head-switching transient near the end of a

field interval; either or both these characteristics might be analysed to deduce that the present playout is from a VCR. In the case of a DVD analogue video output, this signal might be considered to very closely resemble an analogue broadcast signal (received via terrestrial, cable or satellite); a distinguishing feature of DVD playout might be characterised by the absence of VBI signals such as teletext, VPS and/or broadcaster insertion test signals (for example 'staircase', or 'pulse and bar'). These characteristics may be tested to deduce the playout is from a DVD player.

Alternatively the system status information signal applied at port 216 may comprise digital data. To minimise processing overhead in the apparatus, a preferred method is one in which the system status information signal includes an easily decodable identifier indicating an operative component. It will be apparent to the skilled person that many suitable schemes may be devised; however, new or proprietary schemes may not be quickly or commercially accepted in the market and moreover will be incompatible with the existing population of (so called 'legacy') components in the field. A preferred method is where the system status information signal is Project50. The data processing unit may monitor and analyse Project50 traffic available at port 216 to explicitly determine an operative component in the system. This has the advantage that an existing, rather than new, signalling scheme may be utilised and that legacy Project50-enabled components already in the field may also be included. For non-Project50-enabled products, the implicit deduction methods described earlier may be used, thereby ensuring that any home electronics system is compatible with the method of the invention.

As discussed, the data processing unit may generate commands to send to components in the system in response to the receipt of a command. It may employ a variety of strategies in order to identify and associate a command encoding suitable for a specific component in the system. One strategy is for the data processing unit to send a command repeatedly to a component, each repeat using a different command encoding in turn until it senses the component successfully responding to the command; whereupon it may store the relevant encoding type associated with the component in the

store 214. Another strategy is for the data processing unit to monitor remote control commands sent by the user to a component; the data processing unit may receive and identify the command and associate it with a component by sensing the response of a component to the command. These strategies may
5 be especially effective when component response is sensed by monitoring Project50 messages. The above strategies are useful where the commands are sent from the apparatus via infrared or radio. However, sending commands
from the apparatus using infrared or radio has practical limitations of line-of-sight and/or range; in addition such commands must be targeted at a specific
10 component and this may cause problems for example where there are identical components in the system and infrared/radio command encoding schemes do not accommodate such duplicate components. A preferred embodiment is where commands are sent via a system level protocol rather than component level protocol, such that a particular component is uniquely
15 identified within the system, regardless of the number, type or brand of components in the system. As discussed earlier, a custom remote control can be used to apply system level commands to the apparatus; similarly, the apparatus can also send commands (via a suitable medium) to specific components of the system using system level commands. A preferred
20 embodiment is to send commands to components of the system using Project50. An alternative preferred embodiment is to send commands to components using IEEE1394/HAVi.

In order to achieve the goal of ensuring zero involvement by the user in initialising and/or updating the apparatus, a preferred embodiment may
25 arrange to decode and identify infrared remote control commands of all major CE brands and specific component types (TV, VCR, etc.) within those brands. In addition, the apparatus may also be arranged to decode and identify commands received via other media such as wired or radio; in particular via Project50 or IEEE1394/HAVi. In another configuration, the apparatus may
30 alternatively or additionally include decoding and identification of generic remote control commands associated with a custom remote controller supplied with the apparatus. Such a custom remote control might include generic

function keys such as 'menu', 'cursor'(up/down/left/right), 'OK', etc. It is noted that, unlike prior art solutions, the user is not required at any time (i.e. at initial installation or at any subsequent occasion, for example when adding a new component to the system) to identify to the apparatus any configuration information whatsoever (for example the identities of the components in the system and/or the commands they use). A further advantage over the prior art is that a user may on any occasion operate the system using any remote control available to hand which contains the required function key(s).

Figure 3 is a schematic representation of an embodiment of a home electronics system comprising a separate apparatus unit. The home electronics system is shown generally at 300. The system comprises a first component 302, a second component 306 and an apparatus unit 304 all connected via an interconnection means 308. Components in the system can be of any type including, but not limited to, TV, VCR, DVD player, DVD recorder, laserdisc player, audio receiver. A home electronics system may comprise any number or combination of components. In operation, a system comprises at least one component acting as a sink component (that is a component receiving content from another component) and at least one component acting as a source component (that is a component sending content to another component). A typical system usually includes an AV presentation (sink) component or components, for example a TV, audio amplifier, etc.

The interconnection means 308 may comprise any suitable bus or networking means (wired or wireless) or any combination thereof. Wired schemes include, but not limited to, RS232, USB, Ethernet, Project50, IEEE1394/HAVi. Wireless schemes include, but not limited to, Bluetooth, IEEE802.11, ZigBee, HomeRF, WiFi, other low power radio (e.g. 868MHz, 915MHz), IrDA, infrared remote control. With reference to the example of Figure 2 concerning interfacing the apparatus, any of the above interconnection means may be used in any combination to receive commands, to sense a presently operative component or to send a command to a component; as is readily identifiable by the skilled person. Figure 3 shows the

apparatus being logically distinct from the components of the system. In practice, the apparatus may reside externally to the components or may be integrated within a component.

Figure 4 is a schematic representation of an embodiment of a home electronics system comprising wireless connections between the components and the apparatus. The system is shown generally at 400. The system comprises a first component 402 together with radio antenna 404, a second component 406 and radio antenna 408 and an apparatus 410 and radio antenna 412. The components may be of any type. As indicated, the interconnection may be any suitable radio means; alternatively, other wireless means such as infrared may be used. The figure also shows the apparatus connected to an Internet Server 414 by means of a 2-way data link 416, the link being wired or wireless, using means known in the art.

Figure 5 is a schematic representation of an embodiment of a home electronics system comprising an apparatus unit integrated within a component. The home electronics system is shown generally at 500. The system comprises a first component 502 (as denoted by the dashed outline) and a second component 504 connected to the first component by interconnection means 506. The first component 502 comprises an apparatus unit 508, an infrared receiver 510, drivers 512 and sundry other functions 514, said functions being unrelated to the present invention. Infrared commands 516 are sent to the component 502. These are received and demodulated by the infrared receiver 510 and forwarded 518 to the received command signal port (see Figure 2, 216) of the apparatus unit 508. Although interconnection means 506 can comprise any suitable wired or wireless method as discussed earlier, a preferred embodiment for the present example utilises Project50 carried over Scart. The drivers 512 suitably interface the Project50 bus to the system status signal port (see Figure 2, 214) and the send command data port (see Figure 2, 212) of the apparatus unit. The apparatus unit decodes and identifies the received (IR) command, senses the presently operative component (via Project50) and in response may issue one or more substitute commands (via Project50) using the method discussed earlier. Component

502 may be a TV receiver or similar central component; the advantage being that the user normally interacts with such a component intuitively and by using the remote control of the component. For such an adapted TV or similar component, commercial advantages include the fact that the apparatus can be
5 implemented by a relatively simple software upgrade since the infrared receiver 510, drivers 512 and the Scart connector (for clarity, not shown in Figure 5) already exist in typical TV implementations.

The foregoing implementations are presented by way of example only and represent a selection of a range of implementations that can readily be
10 identified by a person skilled in the art to exploit the advantages of the present invention.

In the description above and with reference to Figure 2, an apparatus 200 arranged to control a home electronics system, the apparatus being managed independently of a user, the apparatus comprising a data processing unit
15 (CPU 204, Program ROM 208 and RAM 210), a first communications port 202 operable to receive a command, a second communications port 216 operable to receive a signal indicating an operative component in the system, and a third communications port 218 operable to output a substitute command to a component in the system. On receiving a command, the data processing unit
20 may produce at least one substitute command in dependence on the operative component, which substitute command is then communicated to a component in the system.

CLAIMS

1. A method for controlling a home electronics system comprising a plurality of components, the method being managed independently of a user and invoked on receipt of a command, the method comprising the steps of:
- 5 - sensing an operative component in the system;
- adapting the command to produce at least one substitute command in dependence on the operative component; and
- for each substitute command, communicating the substitute command to a component in the system, which component being operable to respond to the substitute command.
- 10 2. An apparatus arranged to control a home electronics system according to the method of claim 1, the apparatus being managed independently of a user, the apparatus comprising:
- 15 - a data processing unit, comprising a CPU, program ROM and RAM;
- a first communications port operable to receive a command;
- a second communications port operable to receive a signal indicating an operative component in the system; and
- 20 - a third communications port operable to output a substitute command, the data processing unit being arranged to adapt the command to produce at least one substitute command in dependence on the operative component.
- 25 3. An apparatus as claimed in claim 2 wherein the data processing unit comprises a store, which store contains data corresponding to command encoding formats.
- 30 4. An apparatus as claimed in claim 2 wherein the first port is operable to receive remote control commands via infrared.
5. An apparatus as claimed in claim 2 wherein the first port is operable to receive commands via radio.

6. An apparatus as claimed in claim 2 wherein the first port is operable to receive Project50 commands via Scart.
- 5 7. An apparatus as claimed in claim 2 wherein the first port is operable to receive commands via IEEE1394/HAVi.
8. An apparatus as claimed in claim 2 wherein the first port is operable to exchange data and commands with an Internet server via a modem.
- 10 9. An apparatus as claimed in claim 2 wherein the second port signal comprises an AV signal originating from an operative component, the data processing unit being arranged to sense the operative component by analysing the characteristics of the AV signal.
- 15 10. An apparatus as claimed in claim 2 wherein the second port signal comprises digital data identifying an operative component, the data processing unit being arranged to sense the operative component by decoding the digital data.
- 20 11. An apparatus as claimed in claim 10 wherein the digital data comprises Project50 messages.
- 25 12. An apparatus as claimed in claim 10 wherein the digital data comprises IEEE1394/HAVi messages.
13. An apparatus as claimed in claim 2 wherein the third port is operable to output the substitute command encoded in accordance with an infrared remote control format.

14. An apparatus as claimed in claim 2 wherein the third port is operable to output the substitute command encoded in accordance with the Project50 protocol.
- 5 15. An apparatus as claimed in claim 2 wherein the third port is operable to output the substitute command encoded in accordance with the IEEE1394/HAVi protocol.
-
- 10 16. An apparatus as claimed in claim 2 wherein the third port is operable to output the substitute command encoded in accordance with a radio protocol.
17. A home electronics system comprising a plurality of components and an apparatus according to any claim 2 - 16.
- 15 18. A home electronics system as claimed in claim 17 wherein a component comprises the apparatus.
19. A home electronics system as claimed in claim 18 wherein the component is a TV receiver.
- 20 20. A home electronics system as claimed in any claim 17 - 19 wherein the apparatus arranges to automatically download data from an Internet server in response to detecting a new component in the system.
- 25 21. A method for controlling a home electronics system substantially as hereinbefore described and with reference to the accompanying drawings.
- 30 22. An apparatus arranged to control a plurality of components in a home electronics system substantially as hereinbefore described and with reference to the accompanying drawings.

23. A home electronics system substantially as hereinbefore described and with reference to the accompanying drawings.

ABSTRACT

CONTROLLING A HOME ELECTRONICS SYSTEM

5 An apparatus (200) arranged to control a home electronics system, the apparatus being managed independently of a user, the apparatus comprising a data processing unit (CPU (204), Program ROM (208) and RAM (210)), a
10 ~~first communications port (202) operable to receive a command,~~ a second communications port (216) operable to receive a signal indicating an operative component in the system, and a third communications port (218) operable to output a substitute command to a component in the system. On receiving a command, the data processing unit may produce at least one substitute command in dependence on the operative component, which substitute command is then communicated to a component in the system.

15

[Fig. 2]

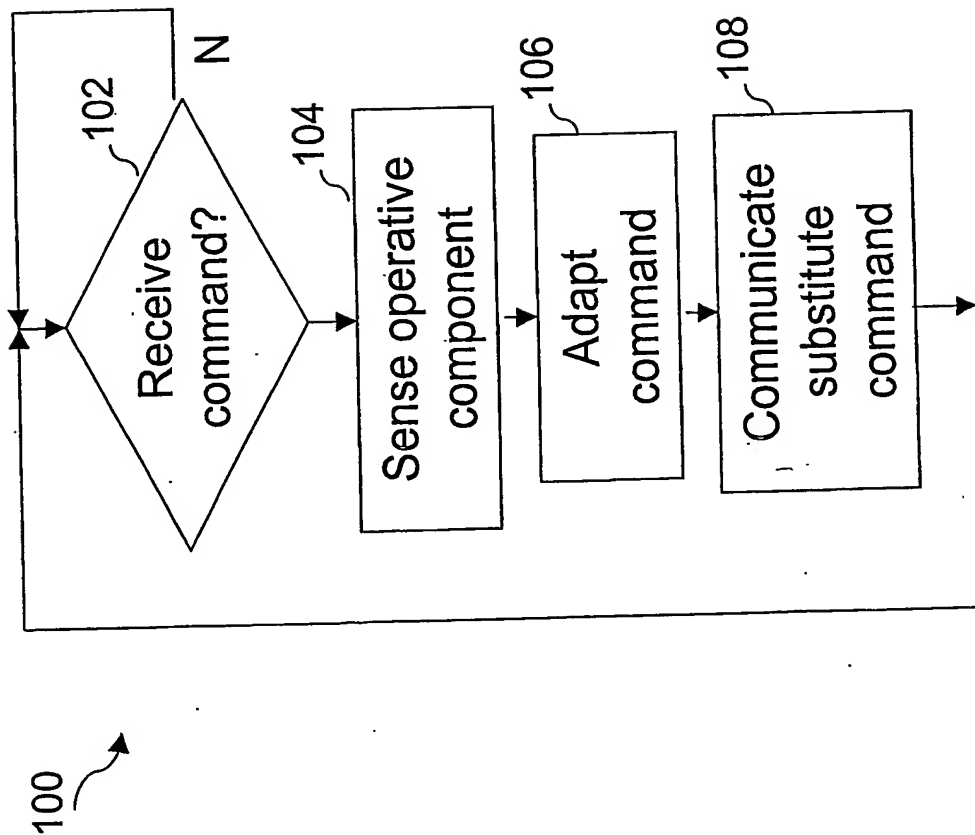


Fig. 1

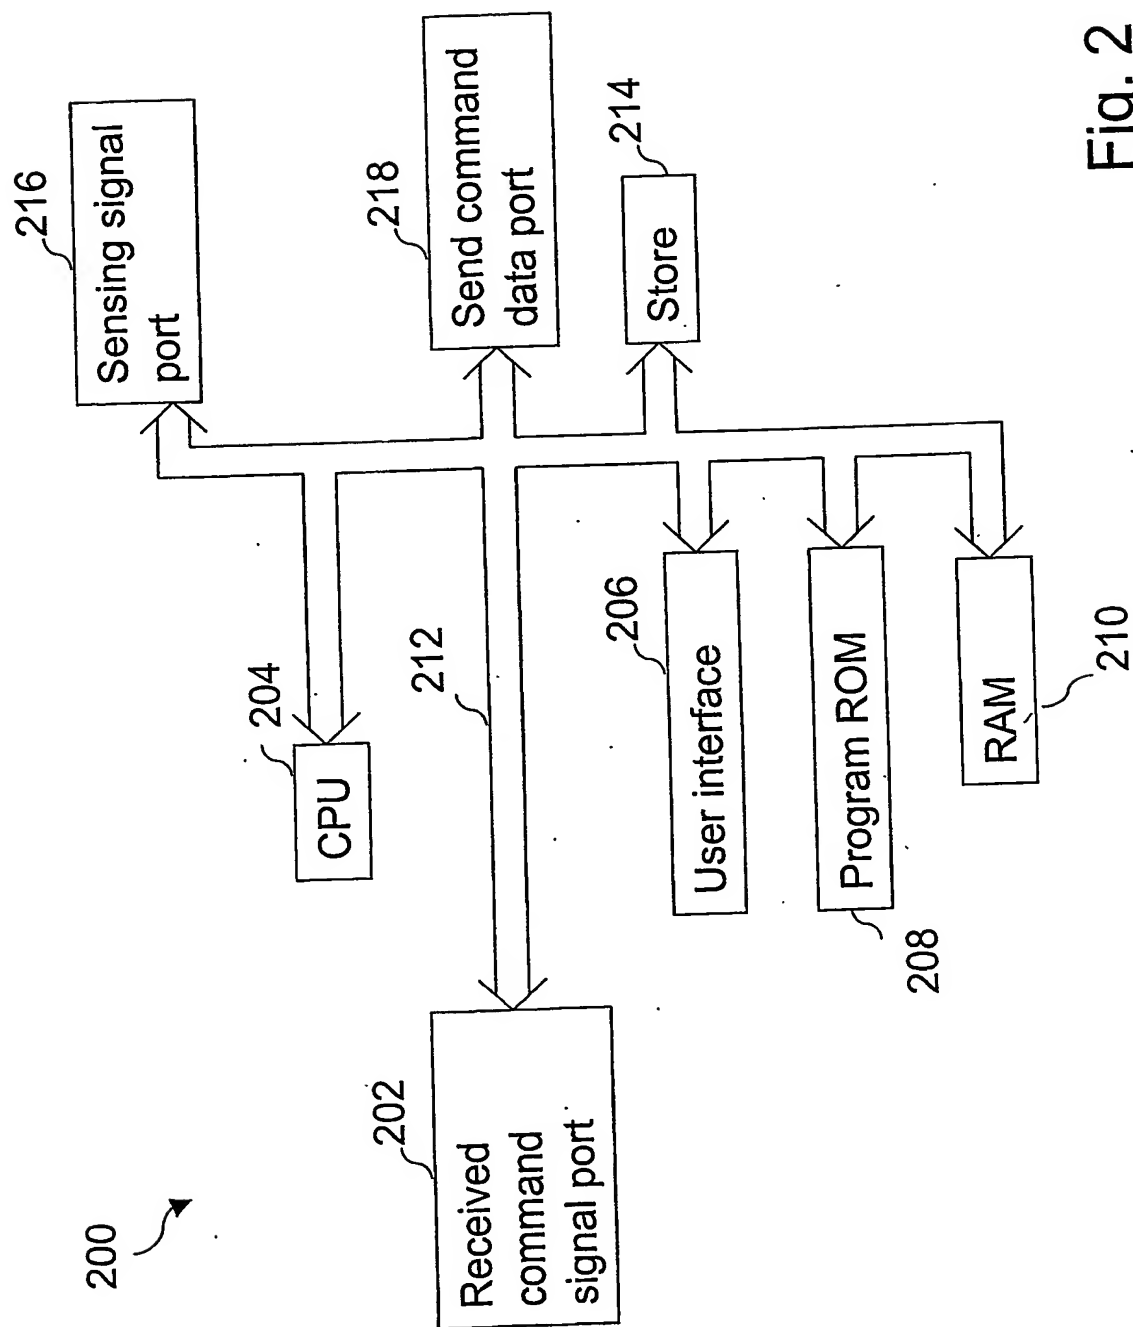


Fig. 2

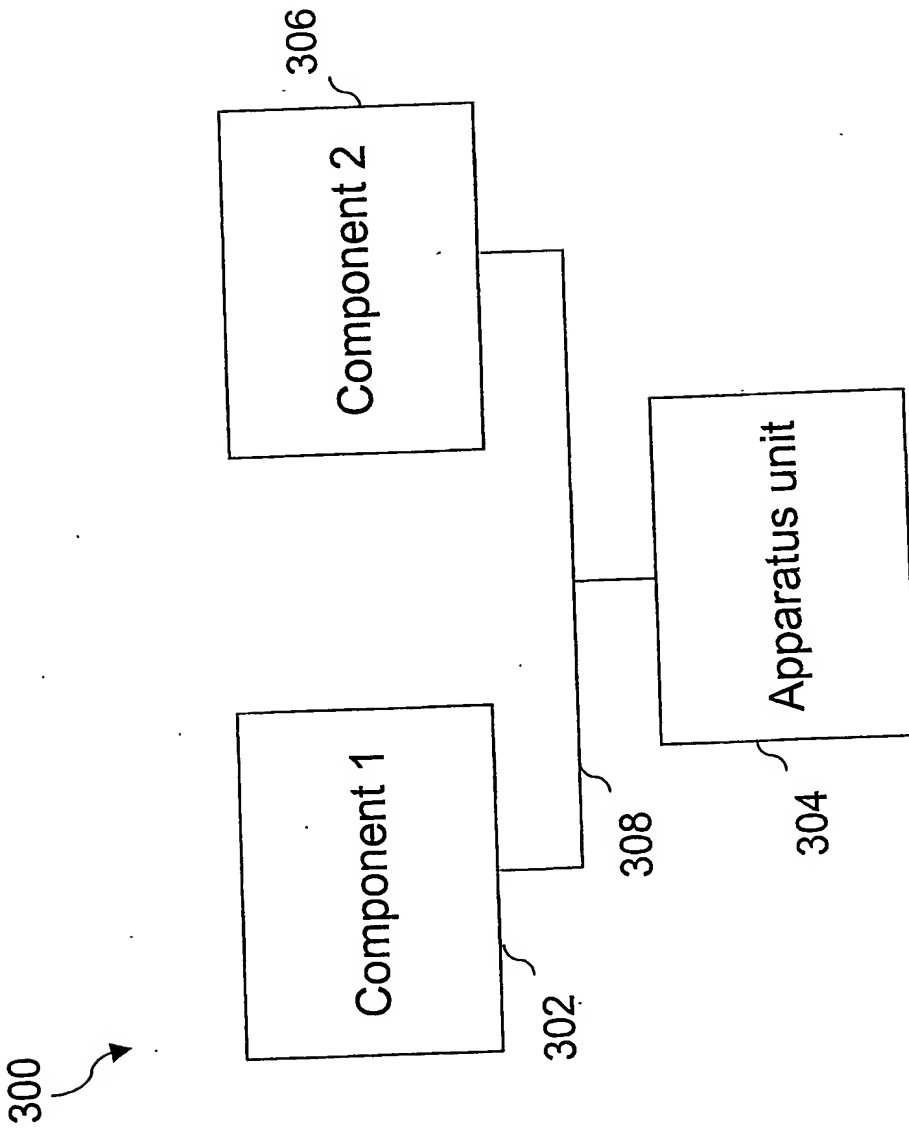


Fig. 3

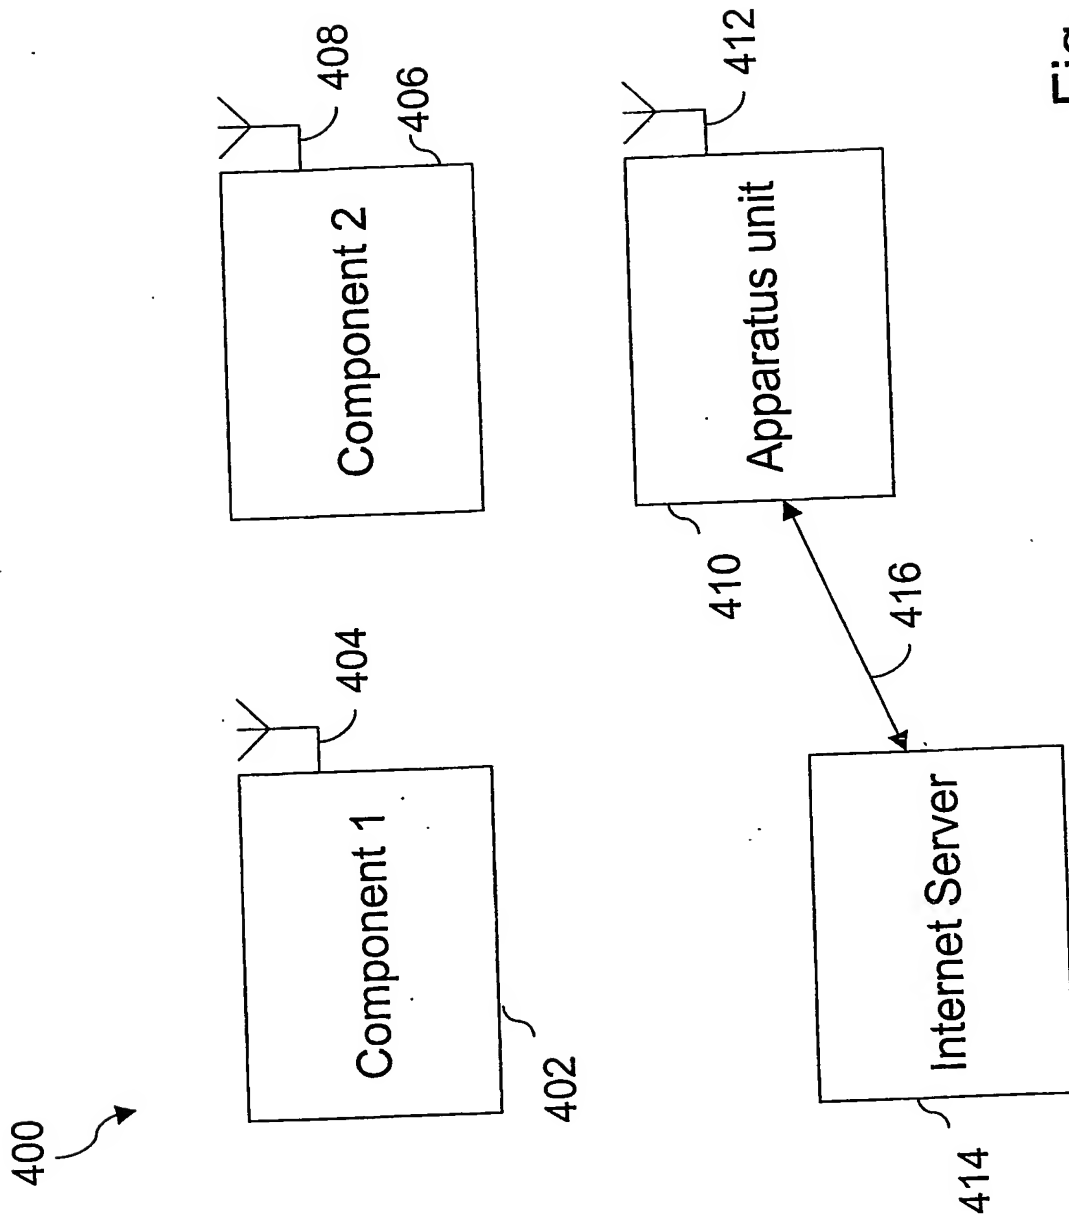


Fig. 4

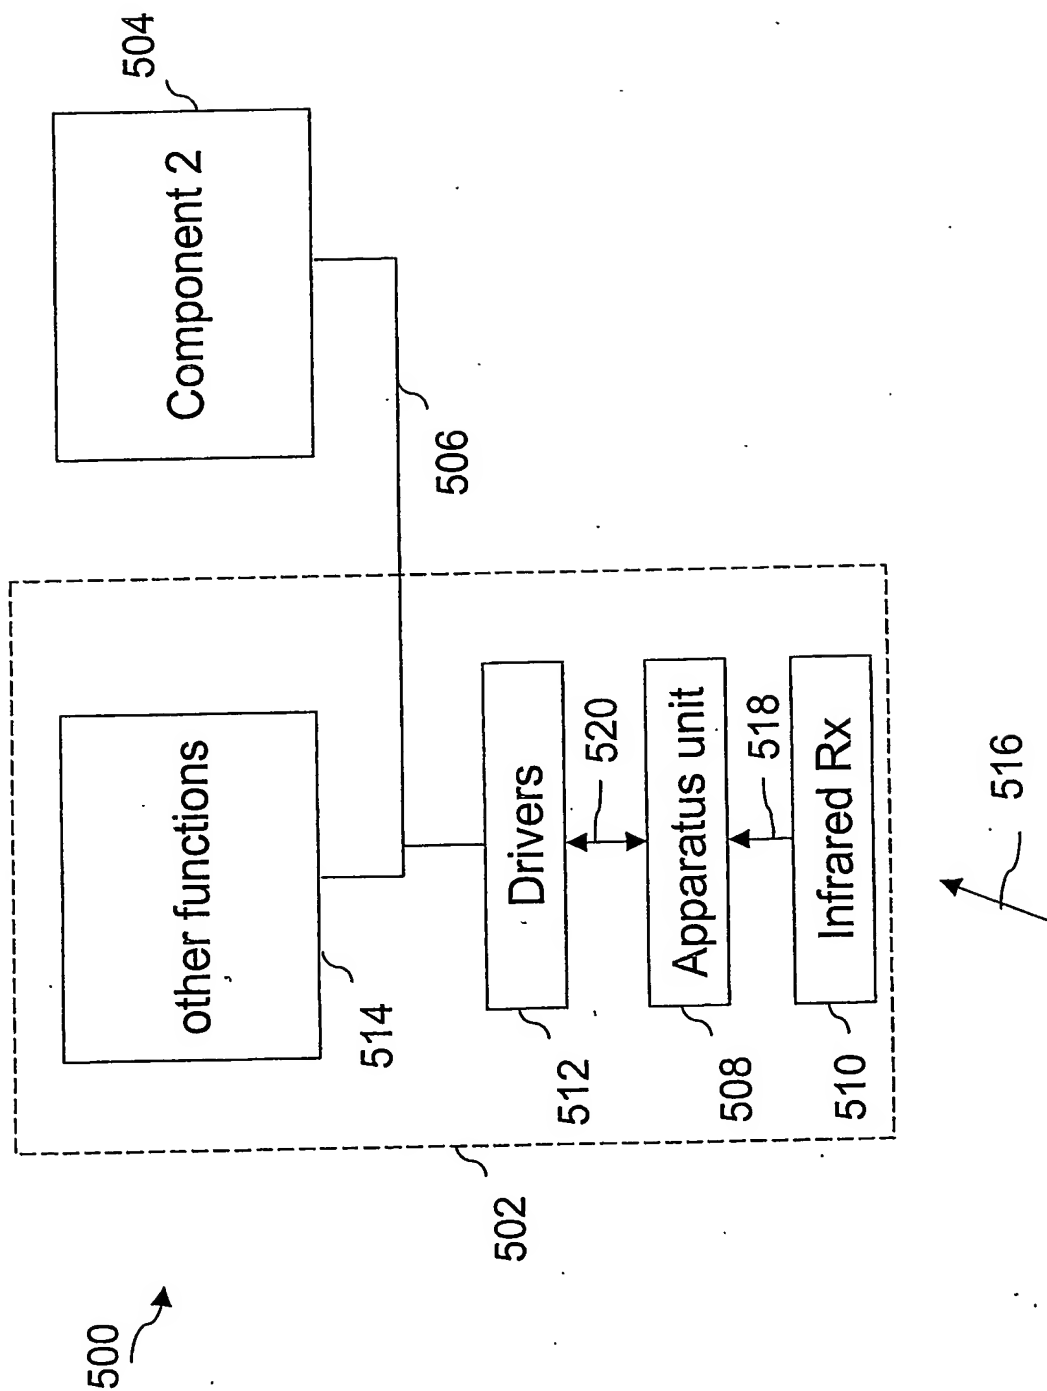


Fig. 5

5/5

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.